mh21 Triple Vactrol Resonators (Eurorack DIY) – RED PCB Edition



Introduction

Here we go again. This is the latest iteration of my version of the PS3100 Resonators. The fonitronik mh21 Triple Vactrol Resonator prototype module has been tranformed from SMT to through hole, suitable especially for Eurorack DIY. But what is it actually? Basically the module incorporates three voltage controlled band pass filters with fixed bandwidth (resonators), using the Dual-Vactrol-based core from the PS3100, and a simple triangle core LFO. By setting the BPFs to different center frequencies and modulating them, we get these nice resonating sounds. Depending on the source waveform and the modulation it might even resemble the human voice. The original purpose, however, was to make string patches sounding more vivid.

Features

Three Band Pass Filters each with

- single input
- CV input + attenuator potentiometer
- initial frequency potentiometer
- LED
- single output

One summed output

One common Audioinput (normalled to single inputs)

One LFO with

- reset (sync) input
- range switch (slow, fast)
- rate potentiometer
- output

The LFO is normalled to the 3 CV inputs, however, for the 3^{rd} CV input the LFO signal can be inverted.

Specifications

The frontpanel measures: 20HP (Eurorack) Mounting depth behind frontpanel incl. power plug: 40mm Power consumption: TBA

BTW this is not meant as a beginners project. I do not provide step-by-step building instructions. I just assume that you already build quite a few projects and know how to read the BOM and schematics.

Layout/Design – RED PCB Edition

General mounting instructions


This project uses two PCBs, one board with the actual circuitry and an additional adapter PCB carrying the front panel components. The adapter PCB is used to mount the PCBs to the front panel.

The PCBs are connected using two 2x10 headers/receptables with 2,54mm pitch (.1in). For stability use four 12mm threaded distance sleeves (M3). Look out for something like this:


Note...

... that the Vactrols and the trimmers are mounted on the rear of the main board, just as the power header. Please, be aware that you have to mount the following parts BEFORE you mount the Vactrols and trimmers: IC1, IC2, IC6, C18, C19, C20,

C5, C6, C26, R60, R61, R62

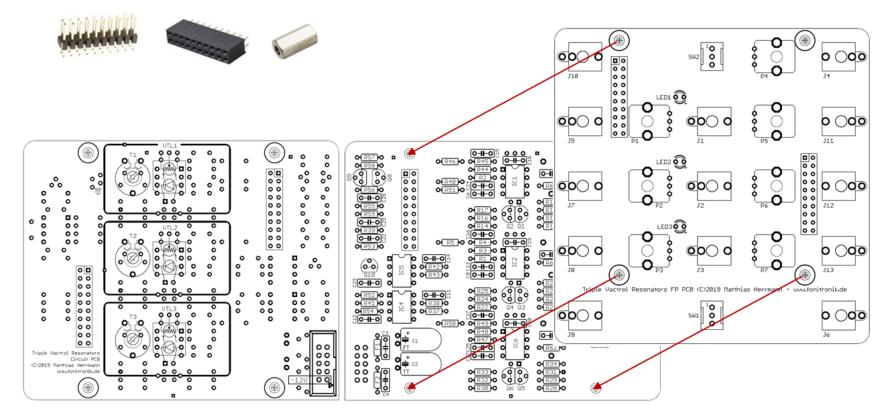

Overlays – RED PCB Edition

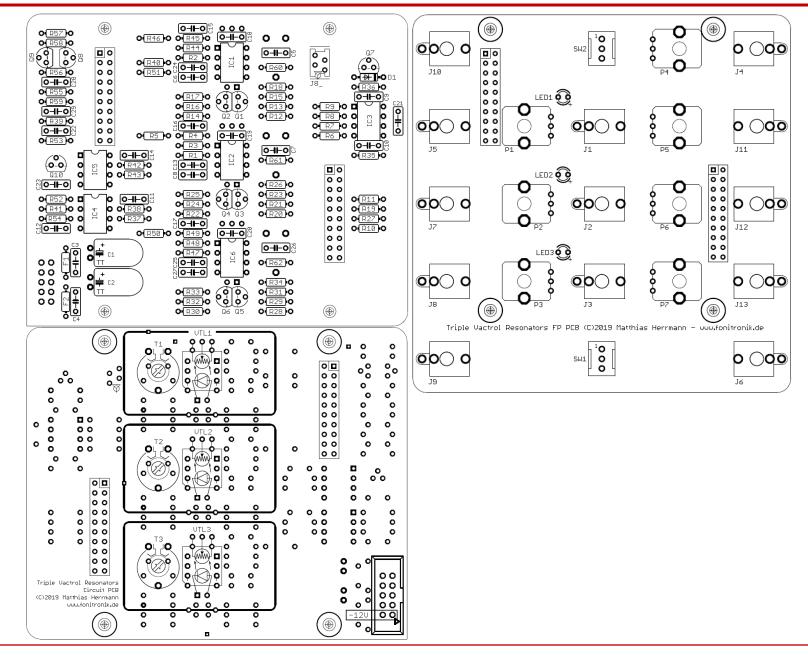

09.04.2019

BOM – RED PCB Edition

Qty	Value	Parts	Description						
	MAIN PCB								
2	10R	F1, F2	or ferrite beads						
3	47R	R5, R46, R50							
3	470R	R17, R25, R33							
9	1k	R10, R40, R41, R60, R61, R62							
3	1.5k	R4, R45, R49							
1	2.2k	R36							
3	2.7k	R15, R23, R31							
1	4.7k	R52							
11	10k	R6, R7, R8, R9, R16, R24, R32, R42, R43, R51, R58							
1	15k	R54							
1	27k	R37							
5	47k	R11, R19, R27, R55, R57							
15	100k	R1, R2, R3, R13, R14, R21, R22, R29, R30, R38, R44, R47, R48, R56, R59							
3	220k	R12, R20, R28							
1	1M	R53							
1	3.3M	R35							
1	10M	R39							
3	100k	T1, T2, T3 (Trimmer)	PT-10 package (mounted on rear)						
Capacitors									
3	100pF	C13, C24, C25							
1	1n	C21							
3	1n (C0G)	C18, C19, C20	or mylar						
1	6.8n	C22							
1	68n	C29							
13	10n	C5, C6, C7, C8, C9, C10, C11, C12, C14, C23, C26, C27, C28							
2	100n	C3, C4							
3	100n (C0G)		or mylar						
2	10uF, 35V	C1, C2							

Otv	Value	Parts			Description						
~-,			N	IAIN PCB							
Semi's											
1	1N4148	D1									
5	2N3904	Q1, C	23, Q5, Q7, 0	Q8							
4	2N3906	Q2, C	Q4, Q6, Q9								
1	J112	Q10			or J111						
5	TL072	IC1, IC2, IC3, IC5, IC6				or compatible					
1	OPA2134	IC4									
3	VTL5C3/2	VTL1	, VTL2, VTL3	i i	Dual Vactrol						
						(mounted on rear)					
Connectors											
_	Header 2x5	RC			Euro Powerheader						
	Header 2x10	X1, X2			female						
Opt	ional (connecto	or on the rear, carrying single outputs and the LFO)									
1	MICROMATCH	04	J8	Tyco Micro Match	n Connector						
			AD	APTER PCB							
2	Header 2x10	X3, X4			male						
13	PJ398SM sockets	J1 - J:	13		Thonkiconn						
7	100k (lin)	Alpha	a 9mm pot (vertical)							
3	LED	2mA	low current	(YMMV)	See table below						
2	SPDT Switch	on-o	on-on (PCB terminals)		Sub-Mini						
LEDs & Resistors											
Part	S	LEDs				Value					
R18	, R26, R34	2mA low current (5 mcd)				1k					
		20mA super bright (7800 mcd)				15k					
		20mA ultra bright (14000 mcd)				47k					

